




## POV0.93-F2 Pro/Indoor Fixed LED Display

**Specification**

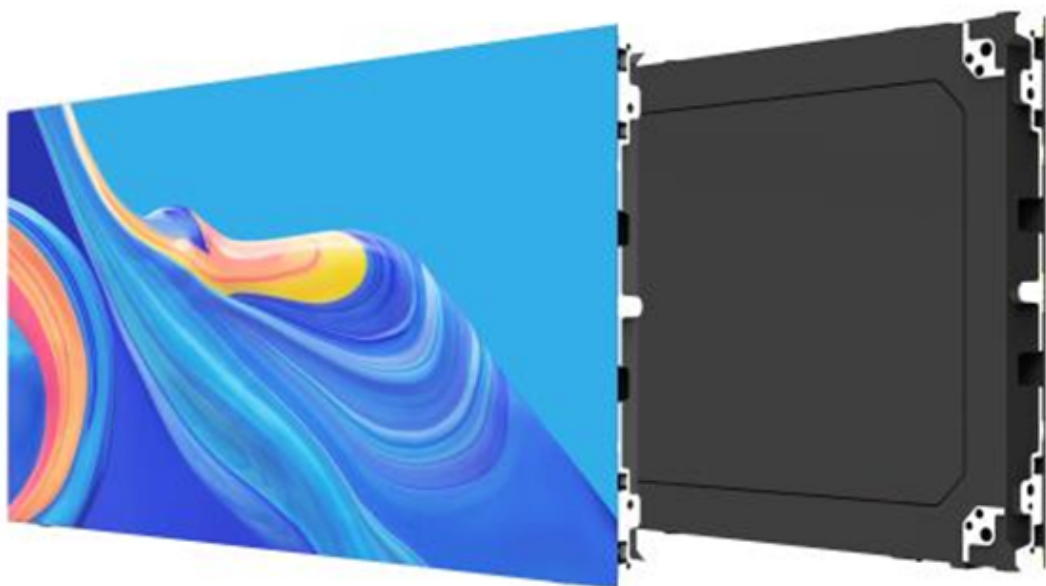

**High Contrast Ratio**



**High Grey Scale**



**High Refresh Rate**



**Front Maintenance**



**Light-Thin Design**



**16:9 Golden Display Scale**

# Technical Parameters

## Basic Parameters

| Parameter                          | Value                        |
|------------------------------------|------------------------------|
| Pixel Pitch（mm）                    | 0.9375                       |
| Pixel Configuration                | COB 1R1G1B                   |
| Brightness（nits）                   | ≥600                         |
| Grey Scale（bit）                    | 14                           |
| Refresh Rate（Hz）                   | 3840                         |
| Frame Rate（Hz）                     | 50 / 60                      |
| Driving Method                     | Constant Current Drive（1/54） |
| Viewing Angle（V/H°）                | 160/160                      |
| Color Temperature（K）               | 2000-10000                   |
| Brightness/Chromaticity Uniformity | 98%                          |
| Contrast Ratio                     | 10000:1                      |
| Module Size（mm）                    | 300×168.75                   |
| Module Resolution（W×H）             | 320×180                      |
| Pixel Density（dot/m <sup>2</sup> ） | 1137778                      |
| Module Weight（kg）                  | 0.3±0.05                     |

# Cabinet Parameters

| Parameter                                     | Value              |
|-----------------------------------------------|--------------------|
| Cabinet Assembly (W×H)                        | 2×2                |
| Cabinet Resolution (W×H)                      | 640×360            |
| Cabinet Size (mm)                             | 600×337.5×32.9     |
| Cabinet Weight (kg)                           | 3.6±0.3            |
| Cabinet Flatness (mm)                         | ≤0.2               |
| Maintenance Method                            | Front Maintenance  |
| Cabinet Material                              | Die-cast Aluminum  |
| Protection Level                              | IP30               |
| Maximum Power Consumption (W/m <sup>2</sup> ) | ≤340               |
| Average Power Consumption (W/m <sup>2</sup> ) | ≤120               |
| Power Supply Requirement                      | AC100—240V,50-60Hz |
| Life Time (hrs)                               | ≥100000            |
| Operating Temperature (°C)                    | -10°C~+45°C        |
| Storage Temperature (°C)                      | -20°C~+55°C        |
| Operating /Humidity (RH)                      | 10%RH~80%RH        |
| Storage Humidity (RH)                         | 10%RH~85%RH        |

 **Note:** The above specification parameters are reference values. The actual use may be slightly different due to product batch differences, configuration differences and operating environment. The actual use shall prevail.